



COMPARISON BETWEEN A SINGLE 5 INCH ROLLER IN A MINIMUM CAVITY
AND DOUBLE 5 INCH ROLLERS STACKED IN A MINIMUM CAVITY

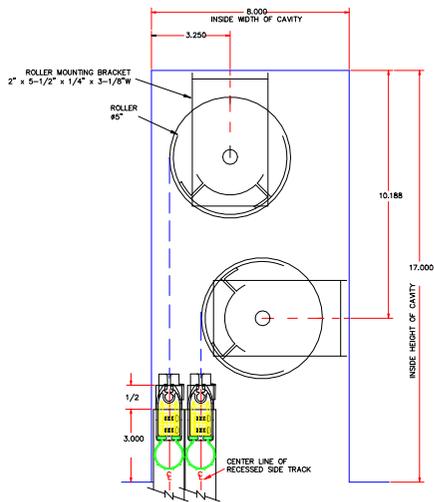

PLACEMENT OF 2 - 5" ROLLERS
IN A CAVITY
STACKED ONE ABOVE THE OTHER
WITH RECESSED SIDE TRACK

- NOTES:
1. DEPTH OF CAVITY BASED ON THE UNIVERSAL SLIDE BAR AND A 4 INCH BOTTOM SEAL.
2. ALL DIMENSIONS ARE GIVEN IN INCHES.
3. INSIDE CAVITY DIMENSIONS ARE THE SMALLEST THAT CAN BE USED TO ALLOW THE BOTTOM BEAD TO CLOSE UP INSIDE THE CAVITY SPACE. UNDER NO CIRCUMSTANCES ARE THE CAVITIES TO BE MADE SMALLER THAN SHOWN.

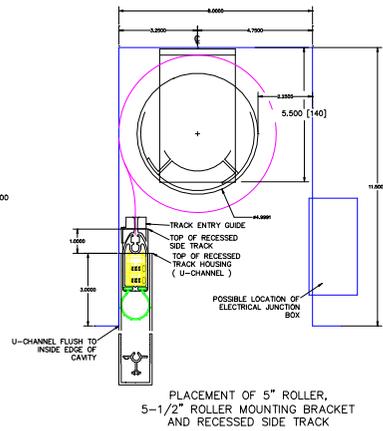

PLACEMENT OF 5" ROLLER,
5-1/2" ROLLER MOUNTING BRACKET
AND RECESSED SIDE TRACK

Rev 01	Addition of Track Entry Guide on Recessed Track and updated cavity dimensions	N.D.R.	02/18/16
Rev #	Description of Revision	Approved By/Date:	Rev #/Date
Creator:	D.S.	Approved By/Date:	
N.D.R.	03/25/2014		
Drawing Title: PSEXECSTACKEDDUALSINCHROLLERS01			
? 2016 Phantom Mfg. Intl Ltd.			Scale: 1 : 1